



TECHNOLOGY
PIONEER
IN CLEAN ENERGY



BLUETTI AC50P

Premium Series

Smart Power, Max Runtime

504Wh | 700W

Efficient, Portable, and Powerful

The BLUETTI AC50P power station is something you can flaunt at your camping group. It features 504Wh capacity and 700W high power output, ensuring you have ample energy to run essentials. The advanced AI-BMS intelligently optimizes energy consumption, maximizing runtime and efficiency.

Flexible to charge via solar panels or battery packs, you can enjoy continuous power without interruption. Lightweight and portable, the AC50P is your go-to power source during outdoor adventures or even emergencies.

Power Up to 6 Devices, All at Once

The AC50P isn't just a power station; it's your personal energy hub. With an array of outlets, including 2 x 700W AC outlet, 2 x 65W USB-C ports, 1 x 15W USB-A port, 1 x 120W cigarette lighter port, and 1 x wireless charging pad, it ensures your off-grid life never misses a beat.

1 x wireless charging pad

1 x 120W cigarette lighter port

2 x 700W AC outlet

2 x 65W USB-C ports

1 x 15W USB-A port



50 mins to 80%	BLUETOPUS AI-BMS AI-Powered Management	1,200W Lifting Power
3,000+ Life Cycles	Pass-Through Solar Charging	5 Years Warranty
6 Ways to Charge	Smart App Control	<0.02s UPS Auto-Switch

Global Available Socket









Triple Tech for Extended Battery Life



BLUETOPUS BMS

This AI-powered battery management system optimizes energy utilization, ensuring sustained power throughout your journey.



Daytime Solar

Recharge during the day with solar panels, allowing you to power your devices while simultaneously replenishing the battery.



* Solar panels and B80P expansion battery are sold separately.

High Power in Small Package

As compact as a small toolbox, the AC50P packs a punch with a 700W rated power, 200W higher than its competitors, powering a wider range of devices. In Power Lifting mode, it can even handle pure resistant loads up to 1,200W, such as kettles.



Ultimate Safety with LiFePO₄ Battery

The AC50P incorporates reliable LiFePO₄ battery cells known for their enhanced safety, extended lifespan, superior thermal stability, non-flammability at high temperatures, and reliability in cold environments.



Emergency Backup Power in 0.02s

The AC50P is a reliable emergency backup power source with its responsive UPS function. During a power outage, it seamlessly switches in just 0.02 seconds, ensuring uninterrupted operation for work and daily life.



Recharge Smarter, Faster, and Safer

With Turbo Charging, the AC50P can charge to 80% in just 50 minutes and fully charge in 80 minutes. When you enjoy a meal or pack your gear, your device will be ready to go in no time.

Plus, the integrated AI-BMS constantly manages the charging and discharging status for an optimized charging process and maximized battery longevity.



Multiple Charging Methods for Any Scenario



AC Charging

80% in **50** minutes,
Full charge in **80** minutes



Solar Charging

Full charge in about
3 hours



Car Charging

5-7 hours (12V Port)
3-4 hours (24V Port)



Generator Charging

Full charge in about
1.2 hours




B80P Expansion Battery Charging

Full charge in about
3.5 hours

Versatile for Various Scenarios



- | | | | | | | | |
|---|---|---|--|--|---|--|---|
| 
Drone (40Wh)
6 Times | 
Coffee Maker (700W)
7 Cups | 
Portable Fridge (110W)
3.2 H | 
Laptop (70Wh)
4 Times | 
Electric Blanket (150W)
2.7 H | 
TV (60W)
5 H | 
Fan (90W)
3.7 H | 
WiFi Router (10W)
22 H |
|---|---|---|--|--|---|--|---|

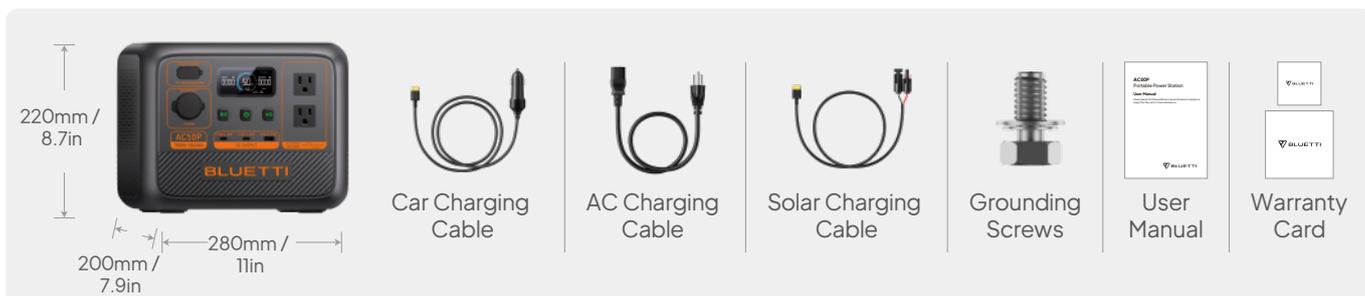

Specifications

General

Battery Capacity	504Wh
Cell Type	Lithium Iron Phosphate (LFP)
AC + DC Input	600W Max.
Net Weight	6.9kg / 15.2lbs
Dimensions (L × W × H)	280 × 200 × 220mm / 11 × 7.9 × 8.7in
Charging Temperature	0°C to 40°C / 32°F to 104°F
Discharging Temperature	-20°C to 40°C / -4°F to 104°F
Storage Temperature	-20°C to 40°C / -4°F to 104°F

DC Output

Cigarette Lighter Port × 1	12V / 10A
USB-A × 1	5V / 3A
USB-C × 2	5 / 9 / 12 / 15 / 20V, 3A; 20V / 3.2A
Wireless Charging Pad × 1	15W Max.

BLUETTI Solar Panel Recommendations

BLUETTI 120W Solar Panel x1	4.7 Hours
BLUETTI 200W Solar Panel x1	3 Hours

AC Output

Power	700W
Voltage	120VAC
Current	5.8A
Frequency	50Hz / 60Hz

AC Input

Voltage	120VAC
Max. Current	8A
Frequency	50Hz / 60Hz
UPS	Switching time ≤20ms
Charging Power	600W Max.

DC Input

Power	200W Max.
Current	8.5A Max.
Voltage	12V to 28V



Contact Us